


# *liuto*

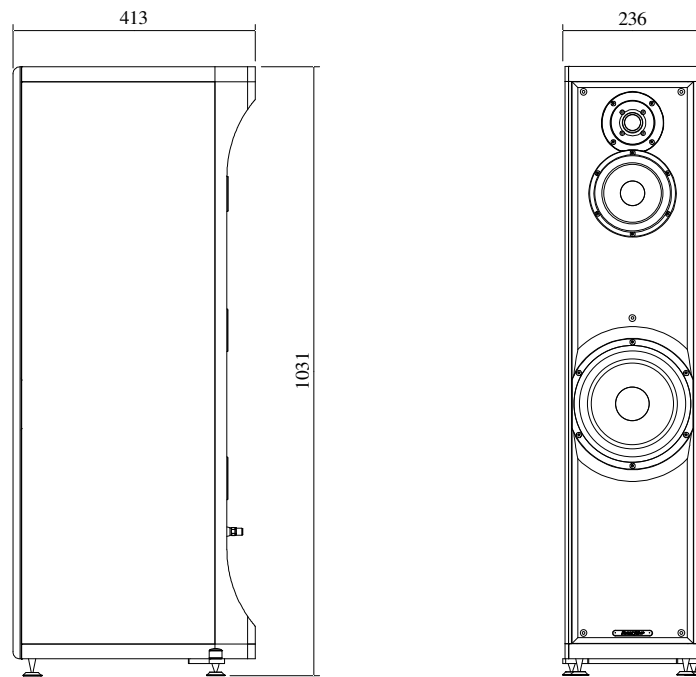

**SYSTEM:** 3 way floorstanding vented box loudspeaker.

**CABINET:** Lute shape design ensures excellent stiffness avoiding resonances and standing waves control. Sub-structural ribs are strategically placed for absolute rejection of spurious vibrations and standing waves control.

**TWEETER:** 25 mm high definition precoated fabric dome driver with a wide soft polymer surround and a rear chamber. Custom design.

**MIDRANGE:** 150 mm cone driver. A free compression basket design and a thermo-muldered polypropylene textile cone, also known as “curv”, ensure an excellent dynamic performance. Custom design optimized synergistically with its acoustic chamber.

**WOOFER:** 220 mm lightweight Aluminum/Magnesium alloy cone driver. Ultra dynamic performance and linearity. Special coaxial anti-compressor is used, designed to remove cavity resonances and distortions.

**CROSS-OVER:** Non-resonant second order design, optimized phase characteristics for optimal space/time performance, cross-over points 350 Hz – 3.000 Hz.

**FREQUENCY RESPONSE:** 40 Hz – 25.000 Hz, tuning ports included.

**SENSITIVITY:** 89 dB SPL (2.83 V/1m).

**NOMINAL IMPEDANCE:** 8 ohm.

**POWER HANDLING:** 40W – 250 W without clipping.

**FINISH:** Combination of goffered black and high gloss black piano lacquer.

**DIMENSIONS:** 1031 x 236 x 413 mm (HxWxD).

**WEIGHT:** 62 Kg per pair – net weight/ 73 Kg per pair – shipping weight.